

Jet-Air
Cool, Warm & Collected



www.jet-air.co.za

Due to **JASA** policy of constant improvement, specifications are subject to change without prior notice.

Remarks: Cooling capacities are based on indoor air temp. 27°C DB, 19°C WB and outdoor air temp. 35°C DB, 24°C WB. The above specifications are subject to change without prior notice for product improvement.

E.&O.E.



- Fresh Air Intake
- Silent
- Auto Restart Function
- Self-diagnosis Function
- Sleep Mode

Jet-Air
Cool, Warm & Collected

Ducted Fixed Speed

R410A

Proudly distributed by

JASA
Smart Home






Ducted Fixed Speed

Technical Specifications



Model	Indoor			JASA-Hi-H12A4/R	JASA-Hi-H18A4/R	JASA-Hi-H24A4/R	JASA-Hi-H36A4/R	JASA-Hi-H36A5/R	JASA-Hi-H48A5/R	JASA-Hi-H60A5/R
	Outdoor			JASA-H12A4/R	JASA-H18A4/R	JASA-H24A4/R	JASA-H36A4/R	JASA-H36A5/R	JASA-H48A5/R	JASA-H60A5/R
Power Supply			V~,Hz,Ph	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	380~415,50,3	380~415,50,3	380~415,50,3
Capacity	Cooling		Btu/h	12000	18000	24000	36000	36000	48000	60000
			kw	3.52	5.28	7.03	10.60	10.60	14.07	17.60
	Heating		Btu/h	12750	19100	26900	39920	39920	53057	63500
			kw	3.73	5.60	7.88	11.70	11.70	15.55	18.50
Electric Data	Rated Cooling Power Input		kw	1.14	1.7	2.26	3.77	3.77	4.85	6.26
	Rated Heating Power Input		kw	1.15	1.55	2.18	3.50	3.50	4.80	5.78
	Rated Cooling Current		A	5.32	7.80	10.37	17.30	6.76	9.10	11.34
	Rated Heating Current		A	5.60	7.11	10.00	16.60	6.28	9.00	10.36
Performance	EER/COP		w/w	3.08/3.24	3.10/3.61	3.11/3.61	2.81/3.34	2.81/3.34	2.90/3.24	2.60/3.20
Indoor Unit	Indoor Air Flow (Hi/Mi/Lo)		m³/h	613/513/433/388	950/760/665	1400/1250/1050	2000/1600/1400	2000/1600/1400	2400/2100/1700	2600/2300/1950
	Noise Level(Hi/Mi/Lo)		dB(A)	39/37/33/29	38/35/32	46/44/42	50/47/41	50/47/41	50/46/44	50/47/45
	External Static Pressure		Pa	20	80	80	80	80	80	80
	Net Dimension (W*H*D)		mm	700×450×200	890x735x290	890x735x290	890×735×290	890×735×290	1250x735x290	1250x735x320
	Packing Dimension (W*H*D)		mm	1005×560×275	1070×800×360	1070×800×360	1070×800×360	1070×800×360	1430×800×360	1430×800×390
	Net/Gross Weight		kg	18.0/21.0	32.0/37.0	33.0/38.0	35.0/39.0	35.0/39.0	45.0/51.0	50.0/56.0
Outdoor Unit	Noise Level		dB(A)	53	55	57	60	60	60	60
	Dimension (W×D×H)	Net	mm	730×285×545	800×315×545	825×310×655	970×395×805	970×395×805	940×370×1325	940×370×1325
		Packing	mm	850×370×620	920×400×620	945×435×725	1105×495×890	1105×495×890	1080×430×1440	1080×430×1440
	Weight	Net/Gross	kg	28/32	42/45	53/56	65/75	65/75	95/105	99/109
Refrigerant Type			g	R410A/750	R410A/1250	R410A/1750	R410A/2200	R410A/2150	R410A/3000	R410A/3000
Refrigerant Pipe	Liquid Side		inch	1/4"	1/4"	3/8"	3/8"	3/8"	3/8"	3/8"
	Gas Side		inch	1/2"	1/2"	5/8"	5/8"	5/8"	3/4"	3/4"
	Max. Length		m	15	20	20	30	30	50	50
	Max. Height		m	10	15	15	20	20	30	30

Indoor Dimension										
Model	Outdoor Dimension(mm)				Air Outlet size		Air Return size		Size of Mounting Lugs	
	A	B	C	D	E	F	G	H	I	J
JASA-Hi-H12A4/R	700	200	450	434	110	532	117	534	750	412
JASA-Hi-H18A4/R	890	290	735	705	202	652	250	810	927	510
JASA-Hi-H24A4/R	890	290	735	705	202	652	250	810	927	510
JASA-Hi-H36A4/R	890	290	735	705	202	652	250	810	927	510
JASA-Hi-H36A5/R	890	290	735	705	202	652	250	810	927	510
JASA-Hi-H48A5/R	1250	290	735	705	183	967	250	1175	1287	510
JASA-Hi-H60A5/R	1250	290	735	705	183	967	250	1175	1287	510

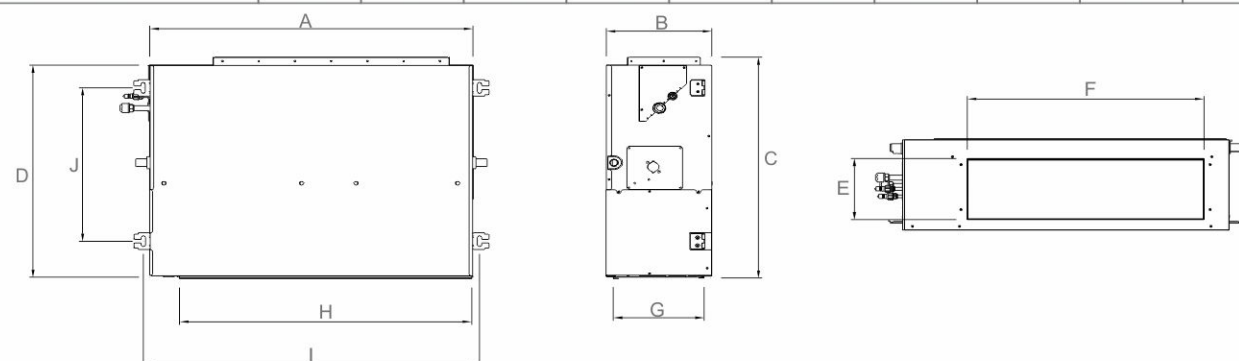

Outdoor Dimension				
Model	W1(W2)xHxD(mm)	Packing Dimension(mm)	A(mm)	B(mm)
JASA-H12A4/R	730(780)x285x545	850x370x620	540	285
JASA-H18A4/R	800(860)x315x545	920x400x620	545	315
JASA-H24A4/R	825(893)x310x655	945x435x725	540	335
JASA-H36A4/R	970(1044)x395x805	1105x495x890	675	409
JASA-H36A5/R	970(1044)x395x805	1105x495x890	675	409
JASA-H48A5/R	940(1010)x370x1325	1080x430x1440	625	364
JASA-H60A5/R	940(1010)x370x1325	1080x430x1440	625	364

