

Jet-Air
Cool, Warm & Collected



www.jet-air.co.za

Due to **JASA** policy of constant improvement, specifications are subject to change without prior notice.

Remarks: Cooling capacities are based on indoor air temp. 27°C DB, 19°C WB and outdoor air temp. 35°C DB, 24°C WB. The above specifications are subject to change without prior notice for product improvement.

E.&O.E.



- Fresh Air Intake
- Silent
- Auto Restart Function
- Self-diagnosis Function
- Sleep Mode

Jet-Air
Cool, Warm & Collected

Cassette Fixed Speed

R410A

Proudly distributed by

JASA
Smart Home






Cassette Fixed Speed

Technical Specifications



Model	Indoor			JASA-Ca-H12A4/R	JASA-Ca-H18A4/R	JASA-Ca-H24A4/R	JASA-Ca-H36A4/R	JASA-Ca-H36A5/R	JASA-Ca-H48A5/R	JASA-Ca-H60A5/R
	Outdoor			JASA-H12A4/R	JASA-H18A4/R	JASA-H24A4/R	JASA-H36A4/R	JASA-H36A5/R	JASA-H48A5/R	JASA-H60A5/R
Power Supply			V~,Hz,Ph	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	380~415,50,3	380~415,50,3	380~415,50,3
Capacity	Cooling		Btu/h	12000	18000	24000	36000	36000	48000	60000
			kW	3.52	5.28	7.03	10.60	10.60	14.07	17.60
	Heating		Btu/h	13500	19100	26900	39920.4	39920	53057	63500
			kW	3.96	5.60	7.88	11.70	11.70	15.55	18.50
Electric Data	Rated Cooling Power Input		kW	1.16	1.70	2.26	3.77	3.77	4.85	6.26
	Rated Heating Power Input		kW	1.22	1.64	2.31	3.50	3.50	4.80	5.78
	Rated Cooling Current		A	5.32	7.80	10.37	17.30	6.76	9.10	11.34
	Rated Heating Current		A	5.60	7.52	10.60	16.60	6.28	9.00	10.36
Performance	EER/COP		W/W	3.03/3.24	3.10/3.41	3.11/3.41	2.81/3.34	2.81/3.34	2.90/3.24	2.81/3.20
Indoor Unit	Indoor Air Flow (Hi/Mi/Lo)		m³/h	750/650/580	800/730/660	1200/950/800	1500/1200/1050	1500/1200/1050	1800/1440/1260	1800/1440/1260
	Noise Level(Hi/Mi/Lo)		dB(A)	41/40/32	45/40/32	45/42/36	48/45/39	48/45/39	53/51/47	53/51/47
	Dimension (W×D×H)	Net(Body)	mm	570×570×260	570×570×260	835×835×250	835×835×250	835×835×250	835×835×290	835×835×290
		Packing(Body)	mm	655×655×295	655×655×295	910×910×310	910×910×310	910×910×310	910×910×350	910×910×350
		Net(Panel)	mm	650×650×55	650×650×55	950×950×55	950×950×55	950×950×55	950×950×55	950×950×55
		Packing(Panel)	mm	710×710×80	710×710×80	1000×1000×100	1000×1000×100	1000×1000×100	1000×1000×100	1000×1000×100
	Weight	Net/Gross(Body)	kg	17.0/20.0	19.0/21.0	25.0/29.0	27.0/30.0	27.0/30.0	28.0/32.0	28.0/32.0
		Net/Gross(Panel)	kg	2.2/3.7	2.2/3.7	5.3/7.8	5.3/7.8	5.3/7.8	5.3/7.8	5.3/7.8
Outdoor Unit	Noise Level		dB(A)	53	55	57	60	60	60	60
	Dimension (W×D×H)	Net	mm	730×285×545	800×315×545	825×310×655	970×395×805	970×395×805	940×370×1325	940×370×1325
		Packing	mm	850×370×620	920×400×620	945×435×725	1105×495×890	1105×495×890	1080×430×1440	1080×430×1440
	Weight	Net/Gross	kg	28/32	42/45	53/56	65/75	65/75	95/105	99/109
Refrigerant Type			g	R410A/750	R410A/1250	R410A/1750	R410A/2200	R410A/2150	R410A/3000	R410A/3000
Refrigerant Pipe	Liquid Side		inch	1/4"	1/4"	3/8"	3/8"	3/8"	3/8"	3/8"
	Gas Side		inch	1/2"	1/2"	5/8"	5/8"	5/8"	3/4"	3/4"
	Max. Length		m	15	20	20	30	30	50	50
	Max. Height		m	10	15	15	20	20	30	30

Indoor Dimension				
Model	A(mm)	B(mm)	C(mm)	D(mm)
JASA-Ca-H12A4/R	260	570	511	463
JASA-Ca-H18A4/R	260	570	511	463
JASA-Ca-H24A4/R	250	835	679	778
JASA-Ca-H36A4/R	250	835	679	778
JASA-Ca-H36A5/R	250	835	679	778
JASA-Ca-H48A5/R	290	835	679	778
JASA-Ca-H60A5/R	290	835	679	778

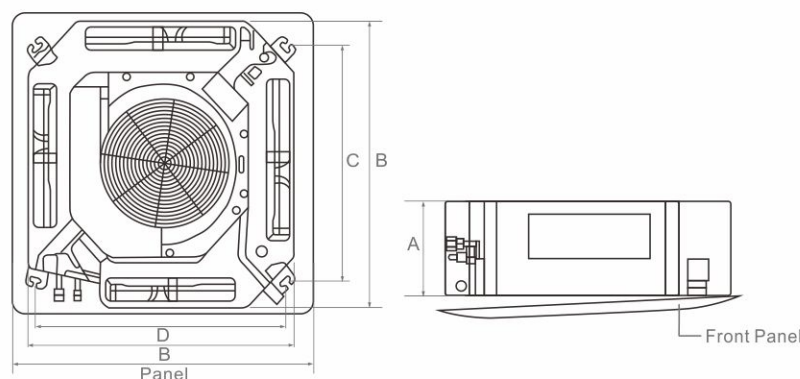

Outdoor Dimension				
Model	W1(W2)xHxD(mm)	Packing Dimension(mm)	A(mm)	B(mm)
JASA-Ca-H12A4/R	730(780)x285x545	850x370x620	540	285
JASA-Ca-H18A4/R	800(860)x315x545	920x400x620	545	315
JASA-Ca-H24A4/R	825(893)x310x655	945x435x725	540	335
JASA-Ca-H36A4/R	970(1044)x395x805	1105x495x890	675	409
JASA-Ca-H36A5/R	970(1044)x395x805	1105x495x890	675	409
JASA-Ca-H48A5/R	940(1010)x370x1325	1080x430x1440	625	364
JASA-Ca-H60A5/R	940(1010)x370x1325	1080x430x1440	625	364

