


Life
is more fun
with a heated
pool

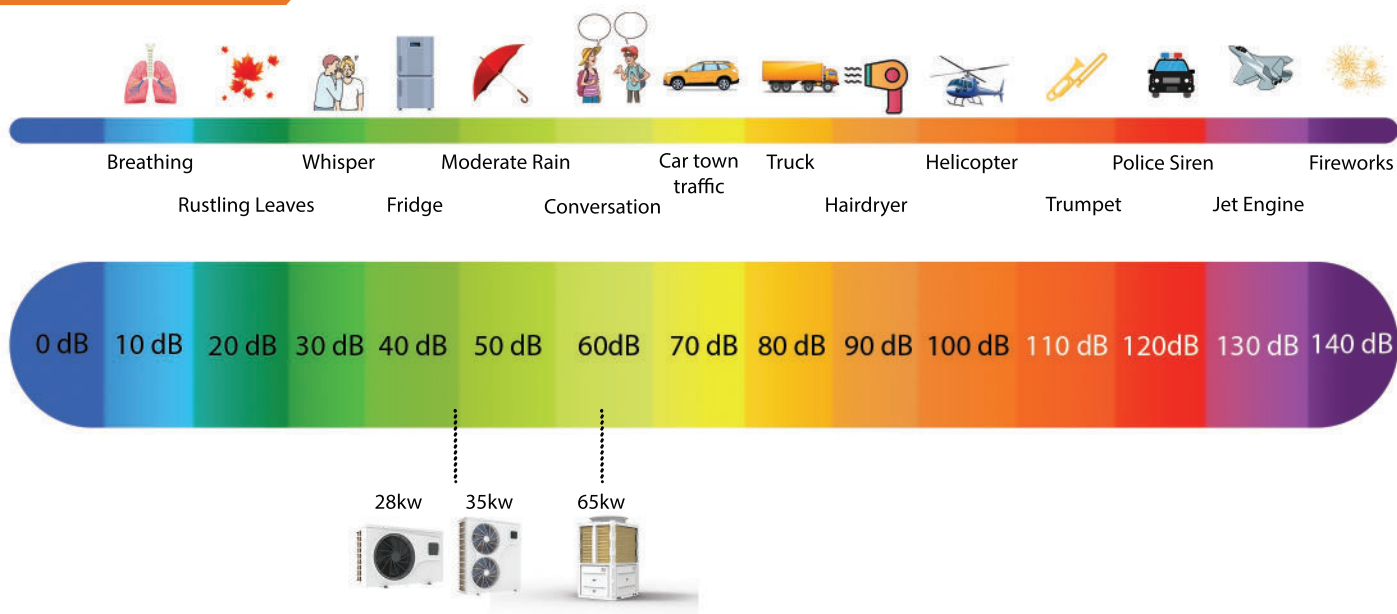

Specifications

GENERAL SPECIFICATIONS			
Model Number	ITS-65VPI3	ITS-35HPI3	ITS-28HPI3
Heating Capacity (A)	16.2-65.00kW	6.7-35.00kW	10,30-28,00kW
Heating Power Input (A)	5.15-10.65kW	0.54-6.89kW	0,820-4,490kW
Heating Capacity (B)	23.30-46.30kW	5.46-23.3kW	7,850-21,00kW
Heating Power Input (B)	3.66-10.40kW	0.85-5.49kW	1,080-4,320kW
Power Supply	380V/3N/50Hz	380V/3N/50Hz	380-415V/3N-/50Hz
Rated Power Input	12.34kw	6.87kW	6,300kW
Rated Current Input	19A/phase	11.68A/phase	10,22A/phase
COP *	Up to 16.1	Up to 12.5	12.5
Noise **	49.5-62dB(A)	48-58dBA	47-55dB(A)
Casing	Powder coated mild steel	UV Stabalised plastic	UV Stabalised plastic
Water Connections	63mm	50mm	50mm
Water Flow Volume	26.8 ³ /h	10m ³ /h	12,0m3/h
Refrigerant	R32/3.9kg	R32a	R32a
Net Dimension (LxWxH) mm	1200x980x1895	1160 x 490 x 1274	1160 x 862 x 490
Net Weight	300kg	120kg	92kg

Heating: Outdoor air temp 27°C / 24°C, Inlet water temp 26°C.

ITS Commercial Inverter Swimming Pool Heat Pumps

- WiFi Enabled
- Energy Efficient
- Silent mode
- Eco freindly R32 gas
- Cooling & heating
- Advanced system protection
- Titanium heat exchanger

